

Turbo-Matching Analysis of Trim Size B60J67, A58N70 and A58N75 turbocharger for Commercial Vehicle Engine

Badal Dev Roy¹, Dr. R. Saravanan²

¹(Department of Mechanical Engineering, Vels Institute of Science, Technology & Advanced Studies (VISTAS), Vels University, Chennai, India)

²(Department of Mechanical Engineering, Professor & Principal, Ellenki Institute of Engineering and Technology, Hyderabad, TS, India)

Abstract: Turbocharger is castigated as the charge booster for IC engines at all operating speeds and road conditions specifically for higher load condition. Appropriate selection of turbocharger is a must because the improper selection may cause surge and choke in flow of charge. The turbo-matching is a tedious task which requires utmost care. This research article focuses on investigation of turbo-matching performances of different turbo-chargers for the desired engine by simulation and on road test (Data-Logger). The turbochargers with trim 67 (B60J67), trim 70 (A58N70) and trim 75 (A58N75) considered for turbo-matching with TATA 497 TCIC-BS III engine. In the data-logger method the road conditions like rough, highway, city Drive, slope up and Slope down were considered. With aid of compressor map the simulated and on road tested observations respect various speeds as well as different compared and discussed the turbo-matching appropriateness.

Keywords – Turbocharger, Turbo-Matching, Simulation, Surge, Choke, data-Logger

Date of Submission: 18-11-2017

Date of acceptance: 30-11-2017

I. INTRODUCTION

Turbo charger is an accessory in the IC engines to boost pressure, especially at higher loads. Turbo charger also helps to reduce specific fuel consumption (SFC), downsizing the engine, reduce CO₂ emission, etc., [1]-[5]. Due to the character of a centrifugal compressor, the turbocharger with engine yields lesser torque than naturally aspirated engine at lower speeds [6][7]. Comparatively, in diesel engine these problems very worse than petrol engine. Some of the system designs were made to manages this problem. They are: adopting the sequential system [8], incorporate the limiting fuel system, reducing the inertia, improvements in bearing, modification on aerodynamics [9], establishing electrically supported turbocharger [10], the use of positive displacement charger i.e., secondary charging system and use of either electric compressor or positive the a displacement charger with turbocharger [10][11] facilitating the geometrical variation on the compressor and a turbine [12], adopting the twin turbo system [13], and dual stage system [14]. It is noticed that the transient condition is always worst with the engine which adopted single stage turbo charger. The variable geometry turbine was introduced for reducing the turbo lag in petrol as well as diesel engines. But the system is not exact match for petrol engines [15]. Even though many findings were reported in this case still the problem is exist. [12],[15]-[18]. Though the advancements in system design like the variable geometry turbine, common rail injection system, and multiple injections, the problem has still persisted due to the limiting parameter say the supply of air. [19] discussed in detail about the benefits, limitations of turbo charger in single stage, parallel and series arrangements. According to the literature the turbocharger matching is a tedious job and demands enormous skill. The turbo matching can be defined as a task of selection of turbine and compressor for the specific brand of engine to meet its boosting requirements. That is, their combination to be optimized at full load. The trial and error method cannot be adopted in this case because the matching is directly affected as well as affects the engine performance [5],[20],[21]. So it is a difficult task and to be worked out preciously. If one chooses the trial and error or non precious method, it will certainly lead to lower power output at low speeds for partly loaded engines for the case of two stage turbo charger. It is because of the availability of a very low pressure ratio after every stage than single stage [21]. Some cases the turbocharger characteristics are not readily available, and in some cases, not reliable or influenced by the engine which is to be matched [19]. Nowadays the Simulator is used for matching the turbocharger to the desired engine. The simulator was used to examine the performance at constant speed of 2000 rpm of two stage and single stage turbo chargers, the aim of the study was to optimize the high load limit in the Homogeneous charge compression ignition engine. For increasing the accuracy of matching the test bench method is evolved. Test bench was developed and turbo mapping constructed for various speeds to match the turbocharger for the IC engine by Leufven and Eriksson, but it is a

drawn out process [21]. The on road test type investigation is called Data Logger based Matching method is adopted in this research. [22] discussed the data-logger turbocharger matching method in detail and compared with the result of the test-bed method and simulator based matching method. And proved the data logger method outputs are reliable. By use of the data logger method the performance match can be evaluated with respect to various speeds as well as various road conditions. The core objective of this research is investigating the appropriateness of matching of the turbocharger with B60J67, A58N70 and A58N75 for the TATA 497 TCIC - BS III Engine by simulator method. The validation of the same by Data-Logger method.

II. MATERIALS AND METHODS

A logical science of combining the quality of turbocharger and engine and which is used to optimize the performance in specific operating range is called as turbo-matching. The Simulator method, data-logger method and Test Bed method is identified for this matching. Apart from the above three this research used the Simulator method and data-logger method for evaluating the performance of turbo matching. The trim size is a parameter, which can be obtained from the manufacture data directly or by simple calculation. That is the trim size is a ratio of diameters of the inlet to the exit in percentage. This parameter is closely related to the turbo matching. Various trim sizes are available, but in this study the trim size 67, 70 and 75 are considered for investigation.

1. Turbo-matching by Simulation

Various kinds of simulation software are being used for turbo matching. In this research the minimatch V10.5 software employed for turbo-matching by simulation. The manufacturer data of the engine and turbocharger are enough to find the matching performance by simulation. The manufacturer data are like turbo configuration, displacement, engine speed, boost pressure, inter cooler pressure drop and effectiveness, turbine and compressor efficiency, turbine expansion ratio, etc. The software simulates and gives the particulars of the operating conditions like pressure, mass flow rate, SFC, required power etc. at various speeds. These values are to be marked on the compressor map to know the matching performances. The compressor map is a plot which is used for matching the engine and turbocharger for better compressor efficiency by knowing the position of engine operating points. Based on the position of points and curve join those points the performance of matching will be decided.

2. Turbo-matching by Data Logger Method

This type of data collection and matching is like on road test of the vehicle. This setup is available in the vehicle with the provision of placing engine with turbocharger and connecting sensors. It is a real time field data gathering instrument called as Data-logger. It is a computer aided digital data recorder which records the operating condition of the engine and turbo during the road test. The inputs are gathered from various parts of the engine and turbocharger by sensors. The Graphtec make data logger is employed in this work. It is a computerized monitoring of the various process parameters by means of sensors and sophisticated instruments. The captured data are stored in the system and plot the operating points on the compressor map (plot of pressure ratio versus mass flow rate). The Fig. 1 depicts the setup for the data-logger testing in which the turbocharger is highlighted with a red circle.

3. Decision Making

The decision making process is based on the position of the operating points on the compressor map. The map has a curved region like an expanded hairpin, in which the left extreme region is called surge region. The operating points fall on the curve or beyond, is said to be occurrence of the surge. That means the mass flow rate limit below the compressor limit. This causes a risk of flow reversal. The right extreme region curve is called as Choke region. The points fall on the curve and beyond its right side is denoted as the occurrence of choke. In the choke region the upper mass flow limit above compressor capacity, which causes the quick fall of compressor efficiency, Chances for compressor end oil leakage and insufficient air supply. The all operating points fall in between those extreme regions, i.e., the heart region holds good. It must be ensured at all levels of operation of the engine holds good with the turbocharger. The manufacturer of Turbocharger provides the compressor map for each turbo charger based on its specifications.

4. Engine Specifications

The TATA 497 TCIC -BS III engine is a common rail type diesel engine. It is commonly used for medium type commercial vehicle like Tata Ultra 912 & Tata Ultra 812 trucks. The engine develops 123.29 BHP at 2,400 rpm and also develops the peak torque of 400 Nm between 1,300 and 1,800 rpm. The other specifications can be found in Table.1

Table -1: Specification of Engine

S.No	Description	Specifications
1	Fuel Injection Pump	Electronic rotary type
2	Engine Rating	92 KW (125 PS)@2400 rpm
3	Torque	400 Nm @ 1300-1500rpm
4	No. of Cylinders	4 Cylinders in-line water cooled
5	Engine type	DI Diesel Engine
6	Engine speed	2400 rpm (Max power), 1400 rpm (Max Torque)
7	Engine Bore / Engine Stroke	97 mm/128mm.

5. Turbochargers Specifications

The TATA Short Haulage Truck, turbochargers of B60J67, A58N70 and A58N75 are considered to examine the performance of matching for TATA 497 TCIC -BS III engine. For example, if specification A58N70 means in which the A58 is the design code and N70 is the Trim Size of the turbocharger in percentage. The other specifications furnished in Table 2.

Table 2: Specification of Turbo chargers

S.No	Description	B60J67	A58N70	A58N75
1	Turbo maximum Speed	200000 rpm		
2	Turbo Make	HOLSET		
3	Turbo Type	WGT-IC (Waste gated Type with Intercooler)		
4	Trim Size (%)	67	70	75
5	Inducer Diameter	46.1mm	48.6 mm	52.5 mm
6	Exducer Diameter	68.8 mm	69.4 mm	70 mm

III. EXPERIMENTAL OBSERVATION

The simulator and data-logger method is adopted to match the turbo Chargers B60J67, A58N70 and A58N75 for TATA 497 TCIC -BS III engine. The matching performance can be obtained in the simulator by feeding necessary data from the manufacturer catalogue. The simulator simulates and presented the values like - pressure ratio and mass flow rate at various speeds. These data were used for identifying the matching performance of the turbocharger for the desired engine. The simulated observations for matching of the turbochargers B60J67, A58N70 and A58N75 turbochargers were furnished in the Table 3. In data-logger method the turbocharger is connected to the TATA 497 TCIC -BS III Engine of TATA 1109 TRUCK with sensors. The vehicle loaded to rated capacity 7.4 tonnes of net weight. The gross weight of vehicle is 11 tonnes. The experimental setup is shown in the Fig. I. The same operating speeds (1000, 1400, 1800 and 2400 rpm) were set for making observations. The on road test conducted and recorded data at different routes namely rough route, highway, city drive, slope-up and slope-down and same was logger database. Those observations presented in the order of rough route, highway, city drive, slope-up and slope-down from Table 4 to Table8 with respect to various engine speeds. The compressor map used for analyzing the matching performance of turbochargers for the desired engine. The recorded observations were plotted on the respective compressor map in such a way that the simulator solution and data logger solution in combine in single compressor map for each route. The Fig.2 is for turbo-match of B60J67, A58N70 and A58N75 turbochargers (left to right) at rough route and simulated solution. Similarly Fig.3 to Fig. 6 for highway, city drive, slope up, slope down routes respectively.



Fig.1 Experimental set up of Data-Logger method

Table 3 Simulated Observations for B60J67, A58N70 and A58N75 Turbo Matching

S.N	Engine Speed (rpm)	Mass Flow Rate (Kg/sec.sqrt K/Mpa)			Pressure Ratio		
		B60J67	A58N70	A58N75	B60J67	A58N70	A58N75
1	1000	10.67	09.534	14.230	1.783	1.856	1.288
2	1400	23.35	20.186	25.936	2.861	3.042	2.696
3	1800	30.81	27.958	34.568	3.401	3.548	3.388
4	2400	36.40	35.488	38.456	3.747	3.764	3.625

Table 4 Data-Logger-Rough Road Observation B60J67, A58N70 and A58N75 Turbo Matching

S.N	Engine Speed (rpm)	Mass Flow Rate (Kg/sec.sqrt K/Mpa)			Pressure Ratio		
		B60J67	A58N70	A58N75	B60J67	A58N70	A58N75
1	1000	07.08	8.43	10.46	1.38	1.29	0.84
2	1400	15.11	16.27	18.45	1.98	1.90	1.70
3	1800	21.43	23.87	26.84	2.36	2.29	2.17
4	2400	27.09	28.49	30.82	2.58	2.51	2.32

Table 5 Data-Logger – Highway Observations for B60J67, A58N70 and A58N75 Turbo Matching

S.N	Engine Speed (rpm)	Mass Flow Rate (Kg/sec.sqrt K/Mpa)			Pressure Ratio		
		B60J67	A58N70	A58N75	B60J67	A58N70	A58N75
1	1000	07.84	8.52	10.52	1.38	1.31	0.84
2	1400	15.62	16.39	18.51	1.98	1.87	1.70
3	1800	21.57	23.94	26.89	2.36	2.3	2.17
4	2400	27.46	28.91	30.85	2.59	2.51	2.32

Table 6 Data-Logger – City Drive Observations for B60J67, A58N70 and A58N75 Turbo Matching

S.N	Engine Speed (rpm)	Mass Flow Rate (Kg/sec.sqrt K/Mpa)			Pressure Ratio		
		B60J67	A58N70	A58N75	B60J67	A58N70	A58N75
1	1000	07.21	08.49	10.58	1.39	1.32	0.88
2	1400	15.32	16.31	18.54	1.98	1.95	1.76
3	1800	21.38	23.78	26.93	2.38	2.33	2.19
4	2400	26.97	28.37	30.91	2.61	2.56	2.36

Table 7 Data-Logger – Slope Up Route Observations for B60J67, A58N70 and A58N75 Turbo Matching

S.N	Engine Speed (rpm)	Mass Flow Rate (Kg/sec.sqrt K/Mpa)			Pressure Ratio		
		B60J67	A58N70	A58N75	B60J67	A58N70	A58N75
1	1000	07.80	8.58	10.62	1.41	1.31	0.88
2	1400	15.51	16.34	18.60	2.04	2.00	1.79
3	1800	21.64	23.98	26.98	2.40	2.37	2.19
4	2400	27.77	28.98	30.95	2.64	2.58	2.39

Table 8 Data-Logger – Slope Down Route Observations for B60J67, B60J68 and A58N75 Turbo Matching

S.N	Engine Speed (rpm)	Mass Flow Rate (Kg/sec.sqrt K/Mpa)			Pressure Ratio		
		B60J67	A58N70	A58N75	B60J67	A58N70	A58N75
1	1000	07.67	08.47	10.37	1.36	1.30	0.81
2	1400	15.19	16.32	18.42	1.96	1.95	1.68
3	1800	21.46	23.89	26.53	2.34	2.31	2.16
4	2400	27.21	28.42	30.67	2.60	2.50	2.30

IV. RESULTS AND DISCUSSIONS

The operating conditions obtained for all three turbo-chargers matching with engine. The observation of both simulated and data-logger at various road conditions like rough, highway, city drive, slope-up and slope-down were marked in the compressor map. In the each graph the simulated matching performance shown for easy comparison and understanding. The Fig.2 illustrates the turbo match by simulation and data-logger (Rough Road Route) for turbo Chargers B60J67, A58N70 and A58N75 for TATA 497 TCIC -BS III engine. Similarly the Fig.3 to Fig. 6 illustrates the turbo-match of turbo chargers B60J67, A58N70 and A58N75 for TATA 497 TCIC -BS III engine by simulation and data-logger at highway, City Road, Slope up and Slope down respectively. This was observed that turbo-match of turbocharger B60J67 the TATA 497 TCIC -BS III engine exhibits well in particularly in medium and higher speeds, but at lower speeds, the surge occurred and A58N75 exhibits well at lower and medium speed but at higher speed choke occurs, so it's decreases the overall performance of compressor. That is the risk of flow reversal at lower speeds by using the B60J67 turbocharger which can be avoided by raising the minimum engine speed more than 1200 rpm. The turbo-match of A58N75 turbocharger decreases the efficiency of compressor which can be avoided by decreasing the Maximum speed to less than 2200 rpm. On other hand match of A58N70 turbocharger exhibits well at low, medium as well as at higher speed and found safe for application purpose. The same was ensured in simulator test, data-logger with all the road conditions like Rough, City Drive, highway, slope up and slope down.

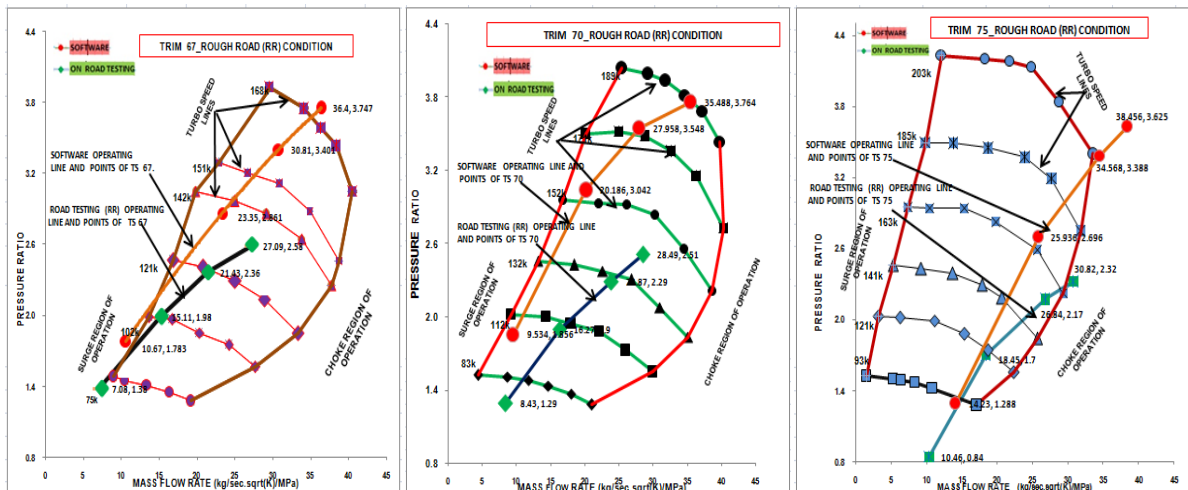


Fig. 2 B60J67, A58N70 and A58N75 Turbo-match- by Simulation & Data-logger – Rough Road

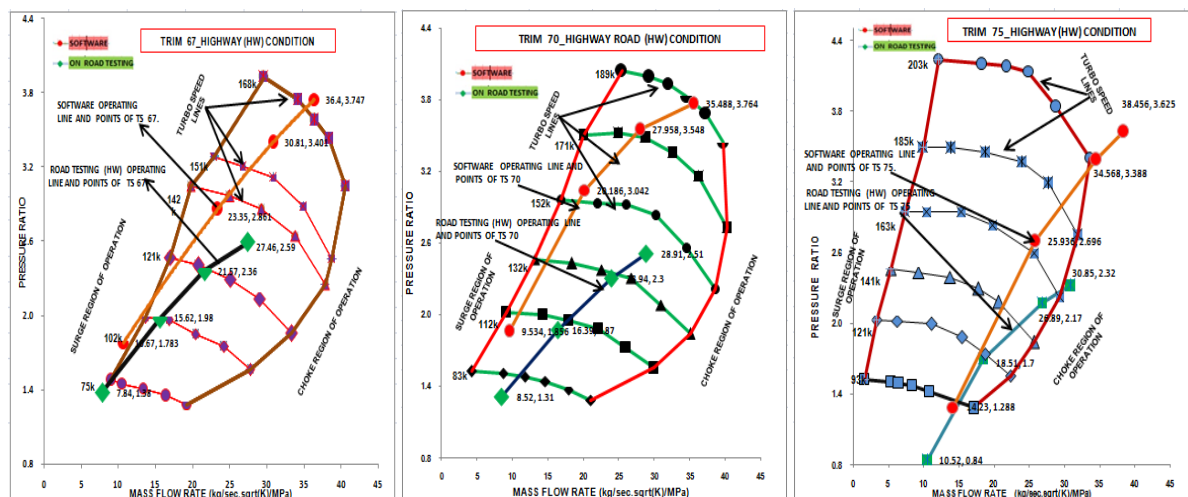


Fig. 3 B60J67, A58N70 and A58N75 Turbo-match- by Simulation & Data-logger – Highway Route

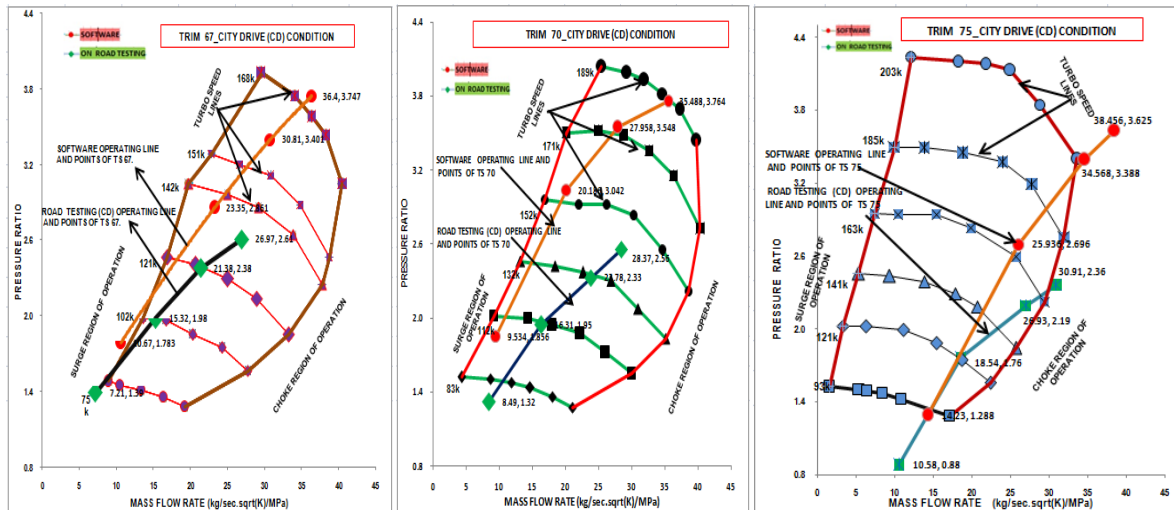


Fig. 4 B60J67, A58N70 and A58N75 Turbo-match- by Simulation & Data-logger – City Route

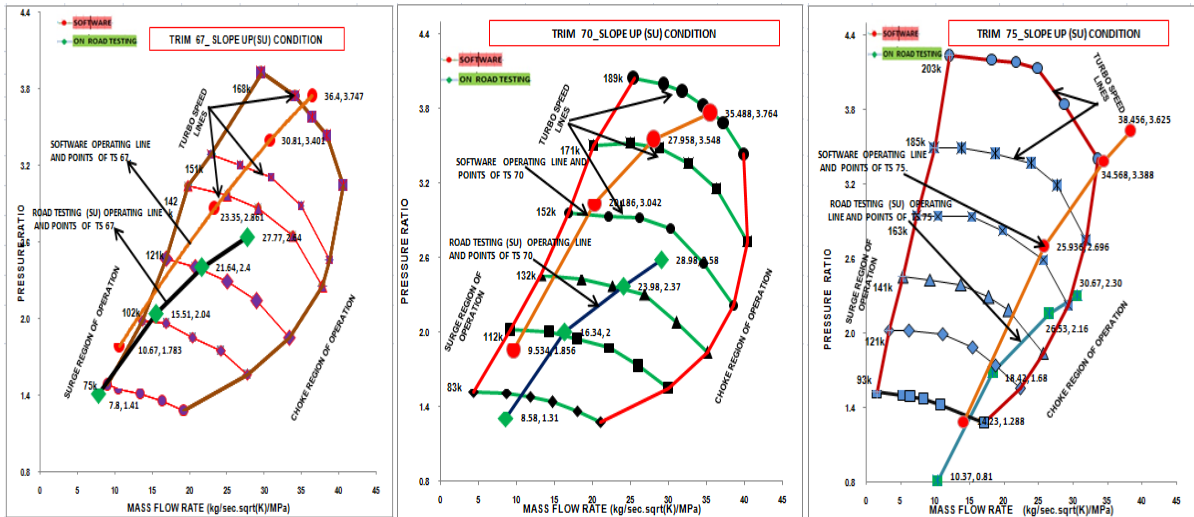


Fig. 5 B60J67, A58N70 and A58N75 Turbo-match- by Simulation & Data-logger – Slope-up Route

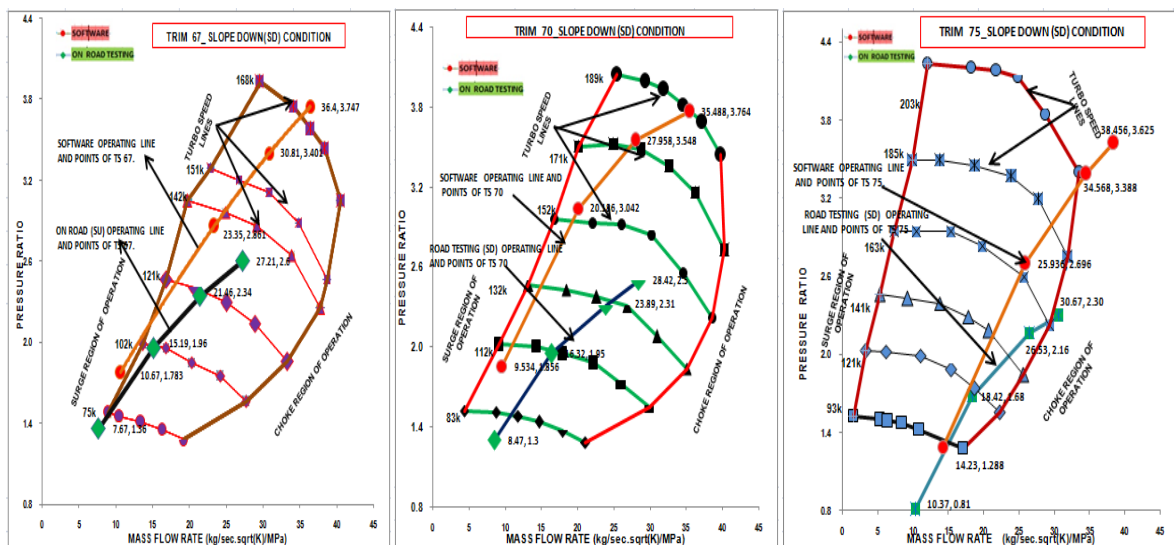


Fig. 6 B60J67, A58N70 and A58N75 Turbo-match- by Simulation & Data-logger – Slope-Down Route

V. CONCLUSION

The turbo-matching study of B60J67, A58N70 and A58N75 turbochargers with TATA 497 TCIC - BS III engine is discussed well in this paper. The simulation and data logger methods adapted for observation. The simulated observations found higher than the data-logger's observations. The data-logger method adapted in this research may feel as expensive but it is one time job of finding the best turbo-match for an engine category. Each turbo charger individually matched with the desired engine and made observations. The same was verified by experimental method called Data-logger at different routes. The simulator gives higher values than the actual values obtained through experimentation. The appropriateness presented in the graphical form in compressor map. The results reveal that the Surge hazard occurs especially at lower speed with B60J67. The reduction engine speed limit to certain extent may be compromised. If so the turbo-chargers B60J67 and A58N75 matching may be done with TATA 497 TCIC -BS III engine. The match of A58N75 turbocharger exhibits safe and well operating conditions at lower speeds irrespective of routes in which vehicle operated but choke hazard occurred at higher speed. The results reveals from A58N70 found well and safe at all the low, medium and high speed condition Hence it can be concluded that the A58N70 trim size turbocharger is the match for the TATA 497 TCIC -BS III engine and suggested to make application with trim size 70 for best matching and same obtained from simulation and verified with actual road condition.

ACKNOWLEDGEMENTS

The authors acknowledge M/s The Cummins Turbo Technology and ARAI, India for their support and contribution for this research work. The authors also acknowledge to the Dr.M.Chandrasekaran, Joint Supervisor, Professor & Director / Mechanical Engineering, Dr.C.Dhanasekaran, Professor & Head / Mechanical Engineering, Co-ordinator for School of Engineering, Vels University. Chennai. Dr.V.Muthukumar, Professor, Saveetha Engineering College, Chennai. And Dr.S.Santhanam, Professor, Rajalaskmi Engineering College, Chennai. TN. India., for their valuable suggestion to carryout this piece of research.

References

- [1] G.Cantore, E.Mattarelli, and S.Fontanesi, A New Concept of Supercharging Applied to High Speed DI Diesel Engines, *SAE Technical Paper 2001-01-2485*, 2001, 1-17.
- [2] L.Guzzella, U.Wenger, and R.Martin, IC-Engine Downsizing and Pressure-Wave Supercharging for Fuel Economy, *SAE Technical Paper 2000-01-1019*, 2000, 1-7.
- [3] B. Lecoointe and G.Monnier, Downsizing a Gasoline Engine Using Turbocharging with Direct Injection, *SAE Technical Paper 2003-01-0542*, 2003, 1-12.
- [4] S.Saulnier and S.Guilain, Computational Study of Diesel Engine Downsizing Using Two-StageTurbocharging, *SAE Technical Paper 2004-01-0929*, 2004, 1-9.
- [5] T.Lake, J.Stokes, R.Murphy and R.Osborne, Turbocharging Concepts for Downsized DI Gasoline Engines, *SAE Technical Paper 2004-01-0036*, 2004, 1-13.
- [6] W.Attard, H.Watson, S.Konidaris and M.Khan, "Comparing the Performance and Limitations of a Downsized Formula SAE Engine in Normally Aspirated, Supercharged and Turbocharged Modes," *SAE Technical Paper 2006-32-0072*, 2006, 1-22.
- [7] A.Lefebvre and S.Guilain, Modelling and Measurement of the Transient Response of a Turbocharged SI Engine, *SAE Technical Paper 2005-01-0691*, 2005, 1-15.
- [8] S.Tashima, H.Okimoto, Y.Fujimoto, and M.Nakao, Sequential Twin Turbocharged Rotary Engine of the Latest RX-7, *SAE Technical Paper 941030*, 1994, 1-10.
- [9] T.Watanabe, T.Koike, H.Furukawa, N.Ikeya, Development of Turbocharger for Improving Passenger Car Acceleration, *SAE Technical Paper 960018*, 1996, 1-9.
- [10] T.Kattwinkel, R.Weiss and J.Boeschlin, Mechatronic Solution for Electronic Turbocharger, *SAE Technical Paper 2003-01-0712*, 2003, 1-8.
- [11] N.Ueda, N.Matsuda, M.Kamata, H.Sakai, Proposal of New Supercharging System for Heavy Duty Vehicular Diesel and Simulation Results of Transient Characteristics, *SAE Technical Paper 2001-01-0277*, 2001, 1-9.
- [12] J.Kawaguchi, K.Adachi, S.Kono and T.Kawakami, Development of VFT (Variable Flow Turbocharger), *SAE Technical Paper 1999-01-1242*, 1999, 1-8.
- [13] C.Cantemir, Twin Turbo Strategy Operation, *SAE Technical Paper 2001-01-0666*, 2001, 1-11.
- [14] C.Choi, S.Kwon and S.Cho, Development of Fuel Consumption of Passenger Diesel Engine with 2 Stage Turbocharger, *SAE Technical Paper 2006-01-0021*, 2006, 1-9.
- [15] J.Andersen, E.Karlsson and A.Gawell, Variable Turbine Geometry on SI Engines, *SAE Technical Paper 2006-01-0020*, 2006, 1-15.
- [16] Z.Filipi, Y.Wang and D.Assanis, Effect of Variable Geometry Turbine (VGT) on Diesel Engine and Vehicle System Transient Response, *SAE Technical Paper 2001-01-1247*, 2001,1-21.
- [17] C.Brace, A.Cox, J.Hawley and N.Vaughan, et al., Transient Investigation of Two Variable Geometry Turbochargers for Passenger Vehicle Diesel Engines, *SAE Technical Paper 1999-01-1241*, 1999,1-17.
- [18] S.Arnold, M.Groskreutz, S.Shahed and K.Slupski, Advanced Variable Geometry Turbocharger for Diesel Engine Applications, *SAE Technical Paper 2002-01-0161*, 2002, 1-12.
- [19] Qingning Zhang, Andrew Pennycott, Chris J Brace, A review of parallel and series turbocharging for the diesel engine, *Proceedings of the Institution of Mechanical Engineers, Part D: Journal of Automobile Engineering*, 227(12), 2013, 1723-1733.

- [20] F.Millo, F.Mallamo and G.Mego, The Potential of Dual Stage Turbo-charging and Miller Cycle for HD Diesel Engines, *SAE Technical Paper 2005-01-0221*, 2005, 1-12.
- [21] N.Watson and M.S.Janota, Wiley-Interscience Ed. Turbo-charging the internal combustion engine, *Diesel motor* – 1982, 608 pages.
- [22] Badal Dev Roy, R.Saravanan, R.Pugazhenthii and M.Chandrasekaran, Experimental Investigation of Turbocharger Mapped by Data-logger in I.C. Engine, *ARPN Journal of Engineering and Applied Sciences*, 11 (7), 2016, 4587 – 4595.

International Journal of Engineering Science Invention (IJESI) is UGC approved Journal with Sl. No. 3822, Journal no. 43302.

Badal Dev Roy Turbo-Matching Analysis of Trim Size B60J67, A58N70 and A58N75 turbocharger for Commercial Vehicle Engine.” International Journal of Engineering Science Invention(IJESI), vol. 6, no. 11, 2017, pp. 75-82.